




### Features

- DUAL-BAND 2.4/5GHz
- IEEE802.11a/b/g/n/ac
- 3X3 MIMO
- HIGH AGGREGATED DATA RATE UP TO 1.75Gbps
- UP TO 32 SSIDs
- CENTRALIZED ARCHITECTURE
- VARIOUS AUTHENTICATION MECHANISMS
- POE (IEEE 802.3at)
- IP67

### High-performance integrated Wireless Access Point

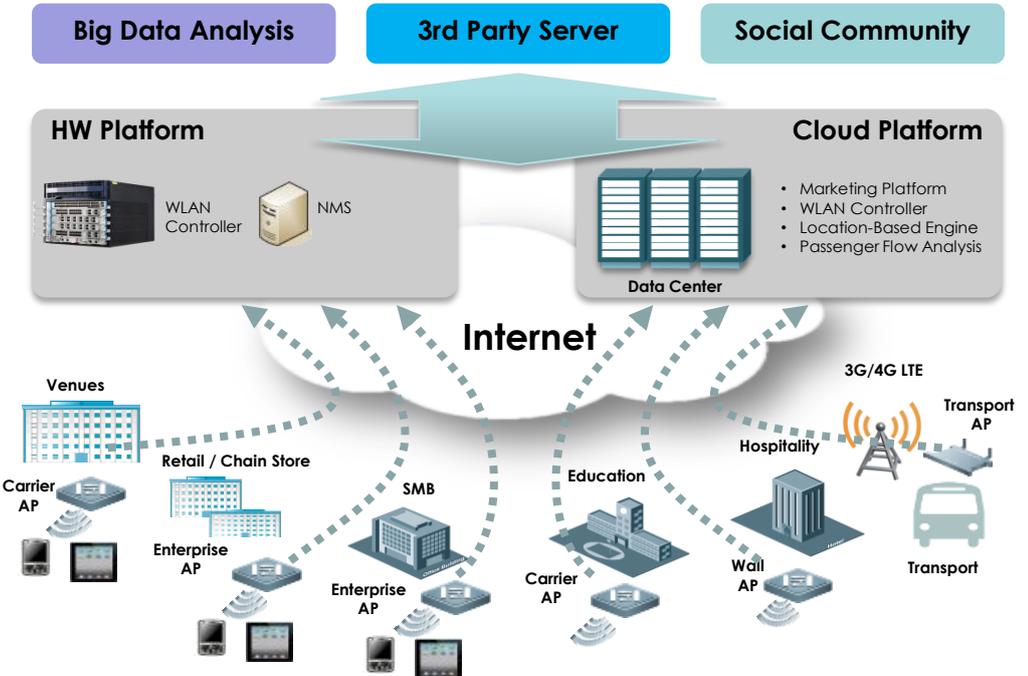

### Description

The UTStarcom's UOA-5280 is the newest intelligent dual-band wireless access point. Compliant with IEEE 802.11a/b/g/n/ac standards and supporting up to 3x3 MIMO, the UOA-5280 can deliver wireless data up to 450Mbps in 2.4GHz band and up to 1.3Gbps in 5GHz band for aggregated performance of 1.75Gbps.

Providing large coverage area, big number of SSIDs and high throughput, UOA-5280 is ideally suited for installation in dense urban environments, deployment of hotspots, providing connectivity in stadiums, malls, campuses, and for

many other applications. Providing up to 32 SSIDs, the UOA-5280 can assign individual parameters and security policies for each SSID. The product provides QoS enforcement through support of a wide range of QoS policies such as WLAN/AP/STA-based bandwidth limitation modes that prioritize key services.

The UOA-5280 supports centralized (FIT) and local (FAT) network modes for greater deployment flexibility and easier device and network management. In FIT AP mode the UOA-5280 is managed via central Access Controller (see UTStarcom's MSG Series), which handles all

aspects of AP operations including configuration of channel, power, SSID, security, VLAN etc.

Its compact size and support of PoE makes it ideal for a variety of applications and deployment scenarios and simplifies site selection and AP installation.

As a part of AC-controlled wireless network, the UOA-5280 efficiently helps operators to meet the ever rising demand for bandwidth.

# UOA-5280

## DUAL-BAND 802.11ac WIRELESS ACCESS POINT



### Product Highlights

#### ROBUST WIRELESS PERFORMANCE

The UOA-5280 supports concurrent dual-band radio, integrated MIMO and OFDM technology and smart WLAN features. It is capable of providing large coverage and data rates up to 450Mbps in 2.4GHz band and up to 1.3Gbps in 5GHz band for aggregated performance of 1.75Gbps.

#### RELIABLE WIRELESS SECURITY

The UOA-5280 supports variety of authentication methods including 802.1X and Web authentication, and provides advanced wireless security features including WPA(TKIP), WPA2(AES), WPA-PSK, and WEP (64 or 128 bits) in order to meet the different access control requirements for different users and applications.

#### CENTRALIZED ARCHITECTURE

Wireless AC or Cloud AC can remotely and centrally control all aspects of AP operations including configuration of channel, power, SSID, security, VLAN etc.

#### COMPREHENSIVE MANAGEMENT

The centralized network management system NMS Netman 8000 OMC-W 3.0.X provides comprehensive control functions and monitoring tools for efficient remote network operation.

#### FLEXIBLE DEPLOYMENT

The AP supports both FIT and FAT modes, and enables easy switching between them based on required deployment scenario. Robust design of the UOA-5280, multiple installation options and support of PoE simplify site acquisition.

#### EASY INSTALLATION AND OPERATION

Zero-configuration installation in FIT mode with auto-configuration via Wireless AC ensures quick installation of the UOA-5280. Centralized configuration, control and optimization functions available with AC-based WLAN facilitate easy deployment of large-scale networks and easy operation and maintenance with fewer site visits required.

#### ENVIRONMENTAL PROTECTION

The UOA-5280 features an industrial-class enclosure that can withstand exposure to extreme conditions and is rated IP67.

### Technical Specifications

#### WLAN CHARACTERISTICS

<b>WLAN Standards</b>	IEEE802.11a/b/g/n/ac
<b>SSID number</b>	Up to 16 per radio (total 32)
<b>Per-SSID configuration</b>	Yes: authentication, encryption, VLAN attributes
<b>Hidden SSID</b>	Yes
<b>Max clients per AP</b>	256
<b>WDS</b>	Yes (Bridge mode)
<b>Fair airtime</b>	Yes
<b>Intelligent identification of smart devices</b>	Yes
<b>Intelligent load balancing based on the number of users or traffic</b>	Yes
<b>STA control</b>	SSID/radio-based
<b>Bandwidth control</b>	STA/SSID/AP-based speed control
<b>5 GHz band preference</b>	Yes
<b>TDMA scheduling</b>	Yes
<b>802.11w</b>	Yes
<b>Dynamic Frequency Selection (DFS)</b>	Yes

#### WLAN SECURITY

<b>WLAN authentication</b>	PSK, Web, and 802.1x, QR code, SMS, PEAP
<b>WLAN encryption</b>	WPA (TKIP), WPA2 (AES), WPA-PSK, and WEP (64 or 128 bits)
<b>WLAN security</b>	Data frame filtering (white list, static/dynamic black list) User isolation Rogue AP detection and countermeasure Dynamic ACL assignment WAPI RADIUS CPU Protection Policy (CPP) Network Foundation Protection Policy (NFPP) WIDS (Wireless Intrusion Detection System) Remote probe*

#### LOCATION-BASED SERVICES

<b>Wireless position tracking</b>	Yes
-----------------------------------	-----

#### RF CHARACTERISTICS

<b>Radio</b>	Concurrent dual-radio dual-band
<b>MIMO</b>	3x3 MIMO
<b>Spatial Streams</b>	3
<b>Frequency Bands</b>	802.11b/g/n: 2.4GHz to 2.483GHz 802.11a/n/ac: 5.150GHz to 5.350GHz, 5.725GHz to 5.850GHz (varies per country)
<b>Data rates</b>	450Mbps@2.4GHz 1.3Gbps@5GHz
<b>Modulation</b>	OFDM: BPSK@6/9Mbps QPSK@12/18Mbps 16-QAM@24Mbps 64-QAM@48/54Mbps DSSS: DBPSK@1Mbps DQPSK@2Mbps CCK@5.5/11Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM and 256QAM
<b>Channel Bandwidth</b>	20/40/80MHz
<b>RF Power output</b>	27dBm max per radio (Note: Actual max transmit power depends on local laws and regulations)
<b>RF Power Adjustment</b>	1dBm step
<b>Receiver Sensitivity</b>	11b: -99dBm(1Mbps), -93dBm(5.5Mbps), -90dBm(11Mbps) 11a/g:-93dBm(6Mbps), -85dBm(24Mbps), -82dBm(36Mbps), -77dBm(54Mbps) 11n:-92dBm@MCS0, -74dBm@MCS7, -92dBm@MCS8, -73dBm@MCS15 11ac HT20: -90dBm (MCS0), -63dBm (MCS9) 11ac HT40: -85dBm(MCS0), -60dBm (MCS9) 11ac HT80: -82dBm(MCS0), -58dBm (MCS9)
<b>Internal Antenna</b>	Built-in omnidirectional 4dBi

\* Denotes features available in a future release.



### Technical Specifications

#### SERVICE INTERFACES

**Ethernet ports** 1 10/100/1000Mbps ETH1/PoE IN port (RJ-45 connector)  
1 10/100/1000Mbps ETH2 port (RJ-45 connector)  
1 SFP port (combo with ETH1)

#### MANAGEMENT INTERFACES

**Management ports** 1 console port (RJ-45 connector)  
Bluetooth (device management)

#### POWER

**Power supply** 802.3at PoE  
**Power consumption** <25W

#### DIMENSIONS AND WEIGHT

**Dimensions, WxDxH** 276 x 246 x 90mm  
(10.87 x 9.69 x 3.54in)  
**Weight** <2.5kg  
(5.51lb)

#### ENVIRONMENTAL

**Operation temperature** -40°C to 65°C  
**Storage temperature** -40°C to 85°C  
**Operation humidity** 0% to 100% non-condensing  
**Storage humidity** 0% to 100% non-condensing  
**Protection** IP67

#### INSTALLATION

Wall-mount  
Pole-mount

#### L2 FEATURES

IGMP snooping  
VLAN features

#### L3 FEATURES

IPv4 address: Static IP address or DHCP reservation  
IPv6 CAPWAP tunnel  
ICMPv6  
IPv6 address: Manual or automatic configuration  
IPv6 tunnel: Manual or automatic configuration  
IPv6 transparent transmission  
ISATAP  
Multicast: Multicast to unicast conversion

#### MANGEMENT

**Management modes** FIT and FAT  
**Network management** SNMP v1/v2C/v3, Telnet, SSH, TFTP, FTP, Web management  
**Visualized wireless heat map analysis** Yes  
**Real-time spectrum analysis** Yes  
**Fault detection and alarm** Yes  
**Cloud AC management** Yes  
**Statistics and logs** Yes  
**FAT/FIT switching** The AP working in FIT mode can switch to the FAT mode through the UT wireless AC.  
The AP working in FAT mode can switch to the FIT mode through a local console port or Telnet.

### Product Details

#### REGULATORY COMPLIANCE

**EMC:** GB9254-2008, EN301 489, EN55022, FCC Part15

**Safety:** GB4943, UL/CSA 60950-1, EN/IEC 60950-1, EN/IEC 60950-22

**Health:** FCC Bulletin OET-65C, EN 50385, IC Safety Code 6

**Radio:** FCC Part15, EN300328, EN301893

**Vibration:** GB/T 2423

\* Denotes features available in a future release.



Please note the information contained herein is for informational purposes only. Technical claims listed depend on a series of technical assumptions. Your experience with these products may differ if you operate the products in an environment, which is different from the technical assumptions. UTStarcom reserves the right to modify these specifications without prior notice. UTStarcom makes no warranties, express or implied, on the information contained in this document.

[WWW.UTSTAR.COM](http://WWW.UTSTAR.COM)

**UTStarcom, Inc.**

1732 North First Street, Suite 220  
San Jose, California 95112, USA  
T: +1 408 453 4557  
F: +1 408 453 4046



A global telecom infrastructure provider of innovative carrier-class broadband transport and access solutions.

© 2017 UTStarcom, Inc.